

HYDRAMAX


Built in shower valve with either flexible or fixed head system

- Thermostatic or manual systems available
- Available complete with either adjustable height shower kit or fixed head
- Multi-mode shower head featuring rub clean nozzles
- Multi-directional swivel inlet elbows supplied
- Integral anti-scale mechanism
- Integral safety features
- Optional 'eco-friendly' performance adapter available for use on approved high pressure water systems
- System specific variants to suit virtually all approved UK domestic water systems
- 2 year comprehensive guarantee

Fixing data

Inlets	15mm 'push fit' swivel elbow connectors 150mm pipe centres Hot left / cold right viewed from front	
Outlets	1/2"-15mm union-type connector required (not supplied) A 1/2" blanking plug is supplied factory fitted to the bottom of the valve body to allow for a top outlet connection. The outlet connector and blanking plug can be reversed as required.	
Shower kit	15mm wall outlet Rail end fixing points 470mm vertically apart	
Fixed head	15mm fixed head outlet	
Pressures	HM.BIR.01T	1.0 – 10.0 bar (max static)
	HM.BIV.01T	1.0 – 10.0 bar (max static)
	HM.BIV.21T	1.0 – 10.0 bar (max static)
	HM.BIR.01LPT	0.1 – 10.0 bar (max static)
	HM.BIV.01LPT	0.1 – 10.0 bar (max static)
	HM.BIV.21LPT	0.1 – 10.0 bar (max static)
	HM.BIV.01M	0.1 – 10.0 bar (max static)

Siting

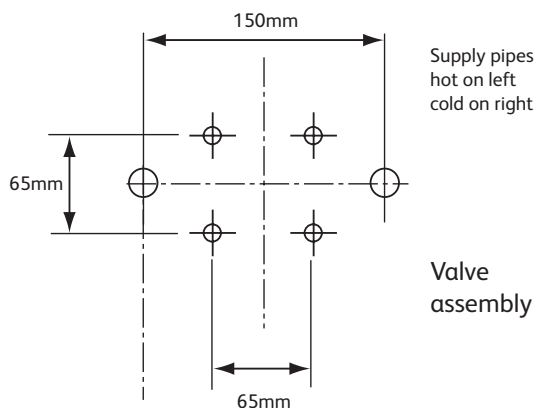

Installation

Refer to installation guide

Spare parts

Refer to separate Hydramax spares sheet

Water system compatibility

HM.BIR.01T		
HM.BIV.01T		
HM.BIV.21T		
HM.BIR.01LPT		
HM.BIV.01LPT		
HM.BIV.21LPT		
HM.BIV.01M		

Colour options

White / Chrome
Chrome (Thermostatic only)

Product codes

HM.BIR.01T	Chrome with fixed head thermostatic – High pressure
HM.BIV.01T	Chrome with flexi head thermostatic – High pressure
HM.BIV.21T	White/chrome with flexi head thermostatic – High pressure
HM.BIR.01LPT	Chrome with fixed head thermostatic – Gravity or Combi
HM.BIV.01LPT	Chrome with flexi head thermostatic – Gravity or Combi
HM.BIV.21LPT	White/chrome with flexi head thermostatic – Gravity or Combi
HM.BIV.01M	Chrome with flexi head manual – Gravity or High pressure

Flow rates (via multi-mode handset)

Low pressure (gravity – 0.1 bar)	approx 6lpm
High pressure (unvented 3 bar)	approx 14lpm (unrestricted) 9lpm (using 'eco-homes' flow regulator assembly – part no. 298501)